

Part Number	CBB65-660R506		Revision	
Customer P/N			Revision	
Capacitance	50	uF.	Tolerance	5.0%
Voltage	660	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.17/2.27	0.06
Case Height (H)	7.28	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
<i>Dimensions in inches</i>		

Stamping	Wuxi - Motor Cap
	CBB65-660R506
	50 uF. 5% 660V
	-40 - +85 C. 50/60 Hz.
	Protected 10,000 AFC
	Non PCB Date Code RoHs

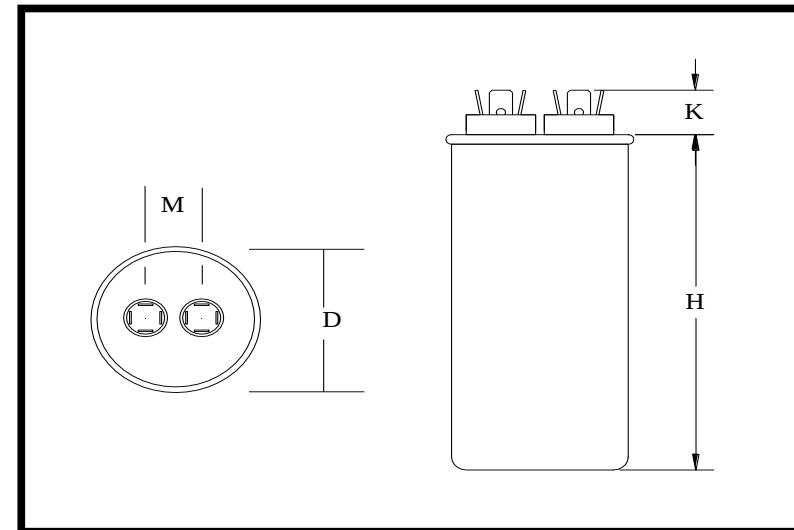

REQUIRED SPECIAL PACKAGING TO AVOID DAMAGE!!

Approval : *J.D. Aldana*
Date : December 18, 2002