

Part Number	CBB65-660R655		Revision
Customer P/N			Revision
Capacitance	6.5	uF.	Tolerance 5.0%
Voltage	660	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-		85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.06	0.06
Case Height (H)	2.56	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

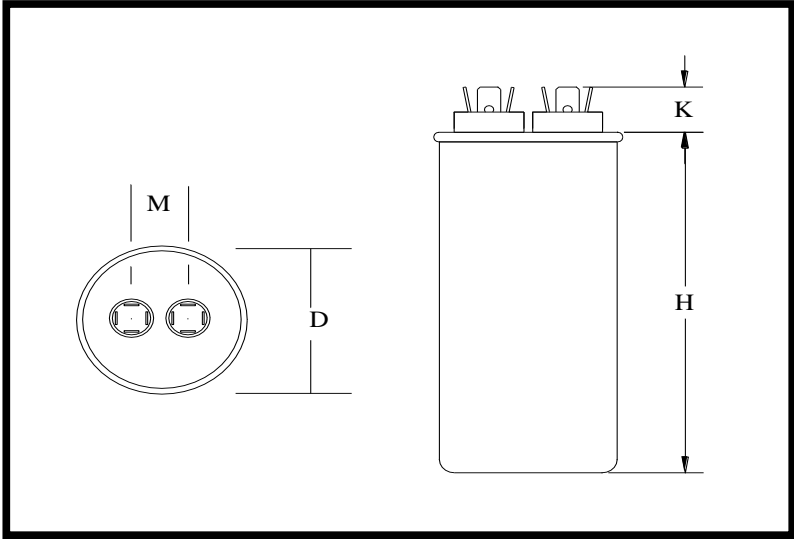

Stamping

Wuxi - Motor Cap
CBB65-660R655
6.5 uF. 5% 660V
-25 - +85 C. 50/60 Hz.

Protected 10,000 AFC
Non PCB Date Code RoHs



Approval : *J.D. Aldana*
Date : May 13, 2004