

Part Number	CBB65-660V206		Revision	
Customer P/N			Revision	
Capacitance	20	uF.	Tolerance	5.0%
Voltage	660	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR

Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive


Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Case / Cover Width (W)	2.75	0.06
Case / Cover Thickness (T)	1.77	0.06
Case Height (H)	3.94	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
<i>Dimensions in inches</i>		

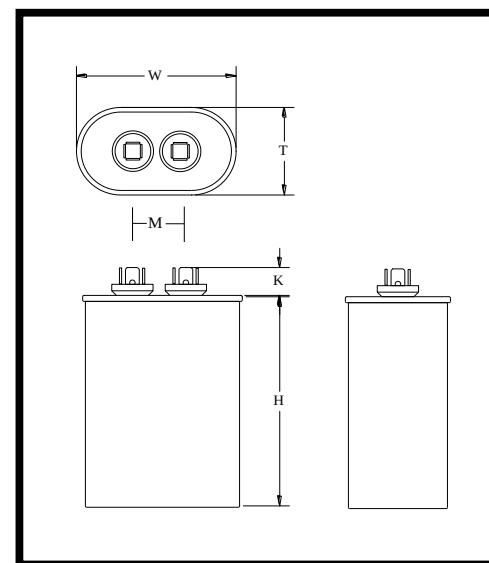

Stamping	
	Wuxi - Motor Cap
	CBB65-660V206
	20uF 5% 660 VAC
	-40 - +85 C. 50/60 Hz.
	Protected 10,000 AFC
	Non PCB Date Code RoHs

Approval: J.D. Aldana
Date: September 8, 2024