


Part Number	<b>CBB65E-370R356-M1</b>		Revision	<b>A</b>
Customer P/N			Revision	<b>A</b>
Capacitance	<b>35</b>	uF.	Tolerance	<b>5.0%</b>
Voltage	<b>370</b>	VAC		
Dielectric	<b>Metallized Polypropylene</b>			
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>			
Operating Temperature	<b>-40 °C.-</b>		<b>70 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
**335 Beinoris Drive**  
**Wood Dale, Illinois 60191**  
**773-774-6666 (Phone) | 773-774-6690 (Fax)**  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Diameter (D) Case/Cover	<b>1.97</b>	<b>0.06</b>
Case Height (H)	<b>3.94</b>	<b>0.06</b>
Terminal Height (K)	<b>0.56</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.74</b>	<b>ref.</b>

*Dimensions in inches*

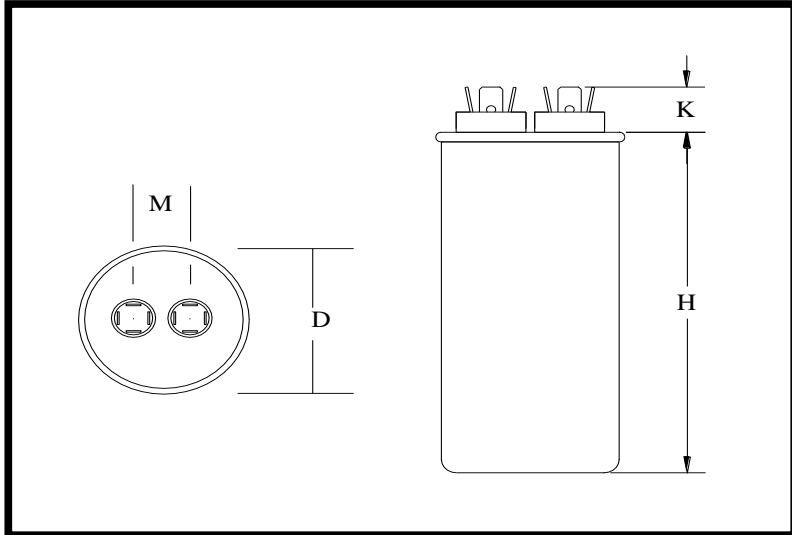

Stamping

**Wuxi - Motor Cap**  
**CBB65E-370R356-M1**  
**35 uF 5% 370VAC**  
**-40 - +70 C. 50/60 Hz.**

**S2 Protected 10,000 AFC** 

**Non PCB    RU    cRU    Date Code    RoHS**

**EIA Standard 456    Extended Life    60,000 HOURS**

Approval : *J.D. Aldana*  
Date : **September 14, 2016**