

Part Number	CBB65E-440R306-M1		Revision	
Customer P/N	008-0030		Revision	
Capacitance	30	uF.	Tolerance	6.0%
Voltage	440	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.75/1.875	0.03
Case Height (H)	4.54	0.03
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
<i>Dimensions in inches</i>		

Stamping	Wuxi - Motor Cap		
	CBB65E-440R306-M1		
	30 uF. 6% 440VAC		
	-40 - +70 C. 50/60 Hz.		
	008-0030		
	S2 Protected 10,000 AFC		
Non PCB	RU	cRU	VDE CE Date Code RoHS

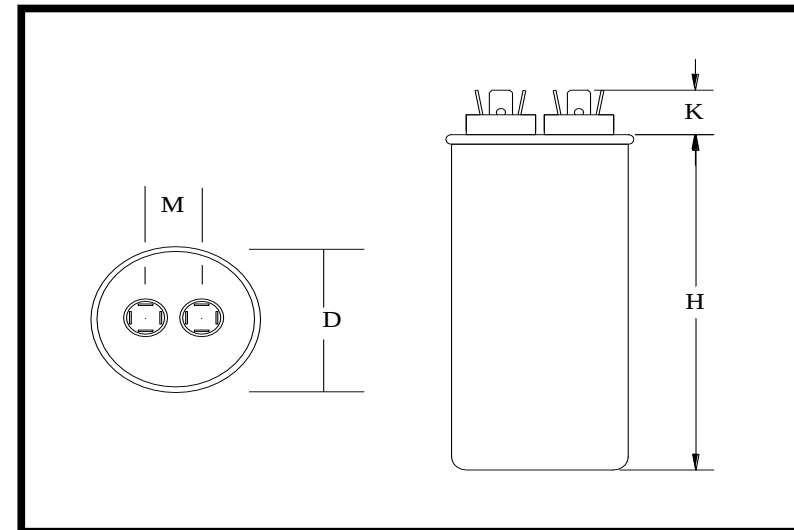

- Meets EIA Standard 456-A
- Rated Life 60,000 Hours
- Agency Approvals: UL, cUL, VDE, CE
- Solid Cover Design; No Fill Hole

Approval : J.D. Aldana
Date : August 5, 2013