


Part Number	<b>CBB66A-540R156</b>		Revision	<b>A</b>
Customer P/N			Revision	<b>A</b>
Capacitance	<b>15</b>	uF.	Tolerance	<b>5.0%</b>
Voltage	<b>540</b>	VAC		
Dielectric	<b>Metallized Polypropylene</b>			
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>			
Operating Temperature	<b>-25 °C.-</b>		<b>100 °C.</b>	
Dissipation Factor	<b>0.0001</b>	maximum	@ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
**335 Beinoris Drive**  
**Wood Dale, Illinois 60191**  
**773-774-6666 (Phone) | 773-774-6690 (Fax)**  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D) Case/Cover	<b>1.97/2.07</b>	<b>0.06</b>
Case Height (H)	<b>3.43</b>	<b>0.06</b>
Terminal Height (K)	<b>0.50</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.70</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.70</b>	

*Dimensions in inches*

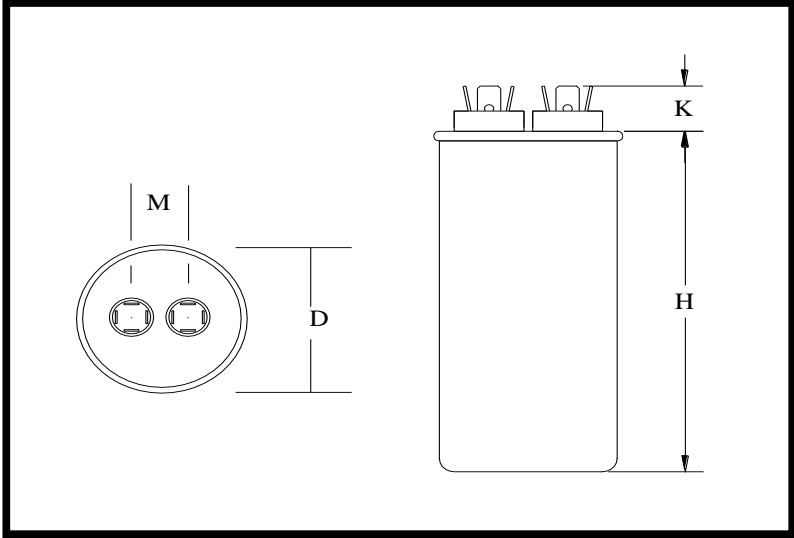

Stamping

**AHJK - Motor Cap**  
**CBB66A-540R156**  
**15 uF +/-5% 540VAC**  
**100 C Max. 50/60Hz.**  
**Protected 10,000 AFC**

**RU**  **US**

**RU Non PCB Date Code RoHs**

Approval : *J.D. Aldana*  
Date : **October 20, 2015**