

Part Number	CBB66A-540R205	Revision	A
Customer P/N		Revision	
Capacitance	2	uF.	Tolerance 5.0%
Voltage	540	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-	100 °C.	
Dissipation Factor	0.0001	maximum @ 60 Hz.	

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.04
Case Height (H)	2.17	0.08
Terminal Height (K)	0.47	0.08
Terminal-Terminal (M)	0.70	ref.
Insulating Cup (dia.)	0.70	


Dimensions in inches

Stamping

AHJK - Motor Cap
CBB66A-540R205
2.0 uF +/-5% 540VAC
100 C Max. 50/60Hz.
Protected 10,000 AFC

C22.2 No. 190-M1985 AMB46C  **US**

Non PCB RoHS Date Code

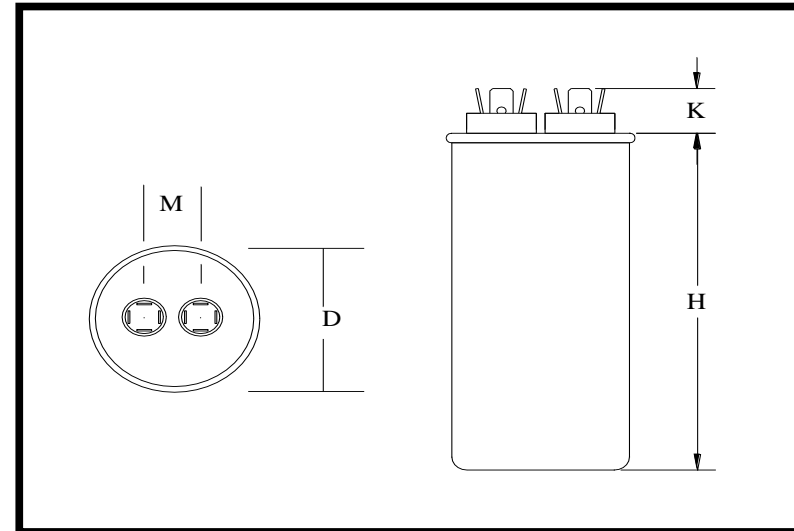

Approval : *J.D. Aldana*
Date : February 24, 2016