


Part Number	CBB66A-540R405		Revision	
Customer P/N			Revision	
Capacitance	4	uF.	Tolerance	5.0%
Voltage	540	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-25 °C.-		100 °C.	
Dissipation Factor	0.0001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	2.17	0.08
Terminal Height (K)	0.50	ref.
Terminal-Terminal (M)	0.70	ref.
Insulating Cup (dia.)	0.70	

Dimensions in inches

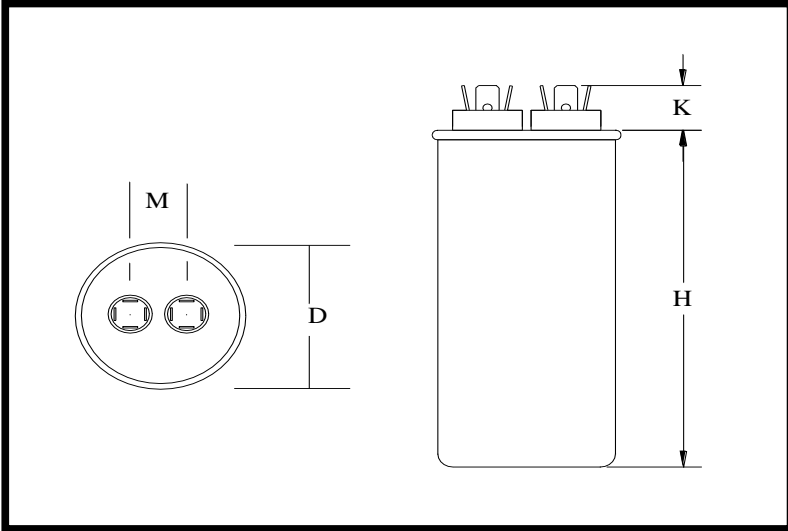

Stamping

AHJK - Motor Cap
CBB66A-540R405
4.0 uF +/-5% 540VAC
100 C Max. 50/60Hz.
Protected 10,000 AFC

RU US

RU Non PCB Date Code RoHs



Approval : *J.D. Aldana*
 Date : March 5, 2019