

Part Number	CBB66A-550R356A-M8	Revision	D
Customer P/N		Revision	D
Capacitance	35	uF.	Tolerance 5.0%
Voltage	550	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25 °C.-	100 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com


	Dimension	Tolerance
Diameter (D) Case/Cover	2.17	0.04
Case Height (H)	4.92	0.12
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.79	ref.
Insulating Cup (dia.)	0.70	ref.
Bottom Mounting Stud	Yes	M-8

Dimensions in inches

Stamping

AHJK - Motor Cap
CBB66A-550R356A-M8
35uF 5% 550 VAC
-25 - +100 C. 50/60 Hz.

Protected 10,000 AFC
Non PCB Date Code RoHS

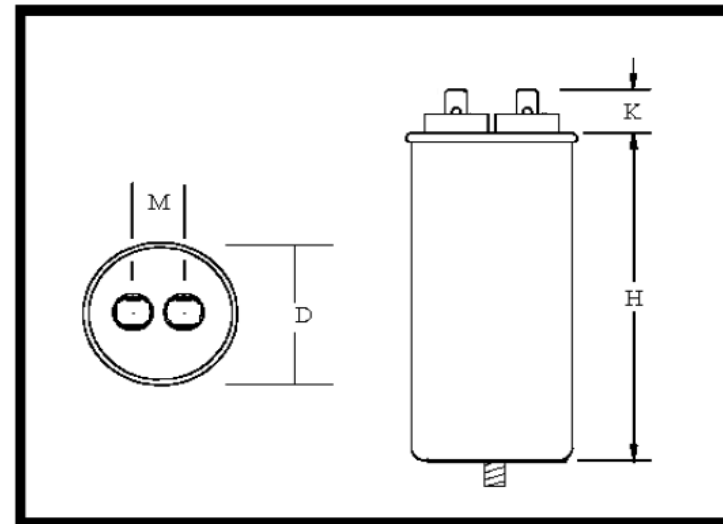

Oil-Filled, Aluminum Can w/ M-8 Bottom Mounting Stud
UL810 UL-cUL Approval (540 VAC); Rated 60,000 Hrs
Rated Power (550 VAC @ 50 Hz) = 3.3 KVAR
Rated Current (550 VAC @ 50 Hz) = 6.05 A

Approved: J.D. Aldana
Date: May 13, 2016