

SEI CAPACITORS

SEI Capacitors, Inc.

335 Beinoris Drive, Wood Dale, IL 60191

Phone: 773-774-6666

Fax: 773-774-6690

www.capacitorindustries.com

CD17S SERIES

Aluminum Electrolytic Capacitors


- Features:
- High stability
 - Small capacitance change
 - Low dissipation factor, low leakage current
 - Used for photo flash



SPECIFICATION

Operating Temperature Range (°C)	-20 ~ +55	
Rated Voltage	330 WVDC	360 WVDC
Voltage Proof	350 SVDC	390 SVDC
Nominal Capacitance Range (uF)	40 ~ 300	
Capacitance Tolerance (20 °C, 120 Hz)	-10% ~ +20%	
Dissipation Factor (20 °C, 120 Hz)	0.06 MAX	
Leakage Current	I = 1XC (at 20 °C, 5 minutes) max I = Leakage Current (uA); C = Nominal Capacitance (uF)	

DIMENSIONS

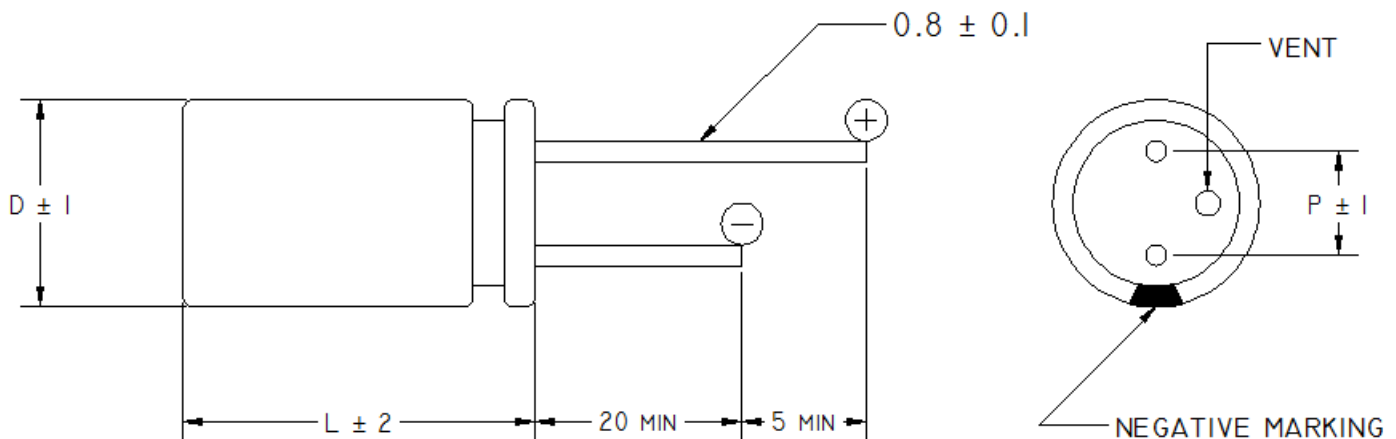

Dimensions are in millimeters (mm)

SEI CAPACITORS

SEI Capacitors, Inc.

335 Beinoris Drive, Wood Dale, IL 60191

Phone: 773-774-6666

Fax: 773-774-6690

www.capacitorindustries.com

STANDARD RATINGS

330 WVDC (350 SVDC)

Capacitance	D (mm)	12	14	16	18
(uF)	P (mm)	5.0	7.5	7.5	7.5
40	L (mm)	25	-	-	-
60		32	-	-	-
80		-	32	25	-
100		-	-	30	-
120		-	-	36	-
140		-	35	40	-
150		-	39	35	-
160		-	38	35	36
180		-	45	38	36
200		-	-	38	40
220		-	52	-	-
250		-	-	-	40

360 WVDC (390 SVDC)

Capacitance	D (mm)	16	18
(uF)	P (mm)	6.0	6.0
150	L (mm)	38	30
180		42	34
200		48	40
250		56	48
300		-	50

Specific capacitance and case sizes are available upon request.