


Part Number	<b>CD60A-1BE288352-T1</b>		Revision
Customer P/N	<b>18-1901-60</b>		Revision
Capacitance	<b>288</b>	to <b>352</b>	uF.
Voltage	<b>125</b>	<b>VAC</b>	
Dielectric	<b>Aluminum Electrolytic</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b>	to <b>65</b>	°C.
Dissipation Factor	<b>0.1</b>	max. @ 60 Hz.	


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	<b>1.50</b>	<b>0.03</b>
Height (L)	<b>3.30</b>	<b>0.03</b>
Wire Length	<b>5.00</b>	<b>0.50</b>
Wire Gauge	<b>18/20</b>	
Wire Color	<b>Black</b>	

*Dimensions in inches*

Stamping	<p><b>JKD - Motor Capacitors</b>  <b>CD60A-1BE288352-T1</b>  <b>320 uF. +/-10%, 125 VAC</b>  <b>#18-1901-60 Motor Starting Capacitor</b>  <b>-25 ~ +65 C.</b>  <b>RU (datecode) RoHS</b></p> 
----------	--

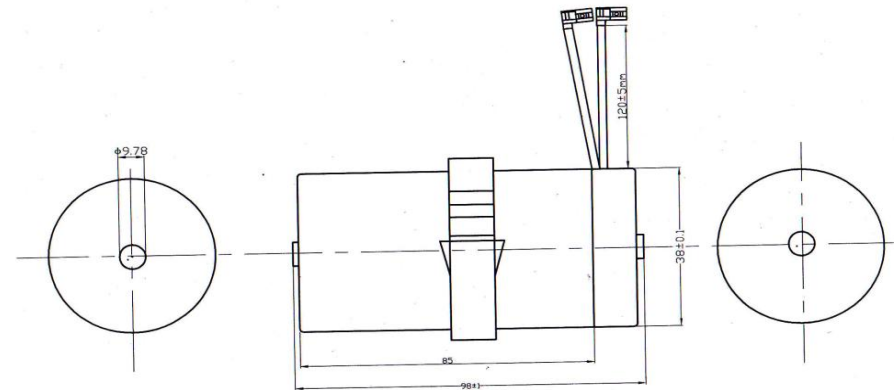

**Type 2 - Standard Duty**  
**D.F. 1.70% 3 min. 50/60Hz.**  
**Additional inspection for bracket required. (See JD/Liam)**

Approval J.D. Aldana  
Date June 12, 2014