

| | | | |
|-----------------------|------------------------------|----|----------------|
| Part Number | CD60A-2BJ113138-T1 | | Revision |
| Customer P/N | 18-1901-61 | | Revision |
| Capacitance | 113 | to | 138 uF. |
| Voltage | 220 | | VAC |
| Dielectric | Aluminum Electrolytic | | |
| Terminal Type | Insulated Wire Leads | | |
| Operating Temperature | -25 | to | 65 °C. |
| Dissipation Factor | 0.1 | | max. @ 60 Hz. |

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


| | Dimension | Tolerance |
|--------------|--------------|-------------|
| Diameter (D) | 1.50 | 0.03 |
| Height (L) | 3.78 | 0.03 |
| Wire Length | 4.50 | 0.50 |
| Wire Gauge | 18/20 | |
| Wire Color | Black | |

Dimensions in inches

Stamping

JKD - Motor Capacitors
CD60A-2BJ113138-T1
113-138 uF, 220 VAC
#18-1901-61 Motor Starting Capacitor
-25 ~ +65 C.
RU (datecode) RoHS
18-1901-61

c RU[®] US

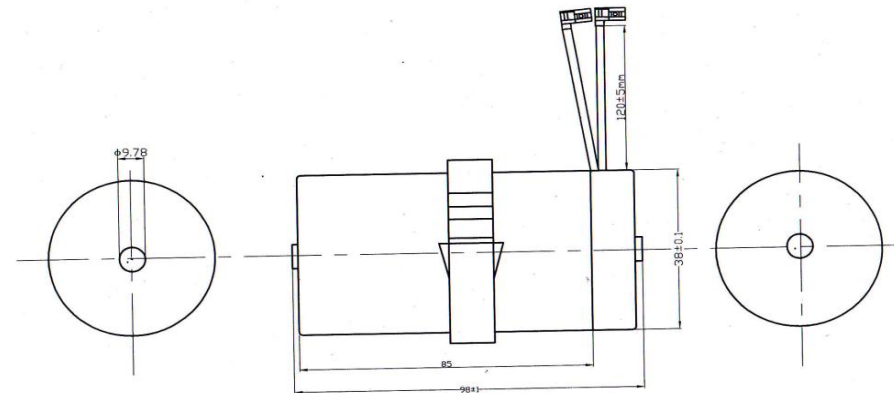

Type 2 - Standard Duty
Capacitor must be Bar Code Labeled with Customer's P/N

Approval J.D. Aldana
 Date **March 5, 2013**