


Part Number	<b>CD60B-1FE145175R-T1M2</b>	Revision	F
Customer P/N	<b>9181003-43 Rev BC</b>	Revision	F
Capacitance	<b>145</b> to <b>175</b>	uF.	
Voltage	<b>165</b>	VAC	
Dielectric	<b>Aluminum Electrolytic Motor Start</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b> to <b>65</b>	°C.	
Dissipation Factor	<b>0.1</b>	max. @ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Diameter (D)	1.81	0.03
Terminal Spacing (C)	0.32	0.02
Height (L1)	3.38	0.03
Height (with Cover) (L2)	3.72	0.03
Quick Connect Terminals	Double	F
Wire Length	6.00	0.50
Wire Gauge	14 AWG	Black

*Dimensions in inches*

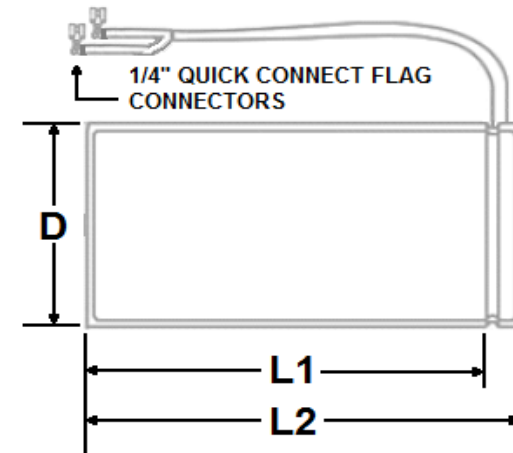


Stamping

**JKD - Motor Capacitors**  
**CD60B-1FE145175R-T1M2**  
**145-175 uF. 165 VAC**  
**#9181003-43 Rev BC Motor Starting Capacitor**  
**-25 ~ +65 C.**

**RU** (datecode) **RoHS CE TUV**  **US**

**Type 1 - Heavy Duty 18K Ohm Discharge Resistor**

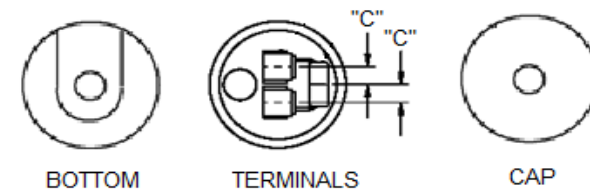

**Type 1 - Heavy Duty 18K Ohm, 2 watt Resistor Attached**  
**With 2 14-AWG VDE-approved conductor cable**  
**Button feature on CAP/COVER for bracket**  
**1/4" quick connect flag connectors on terminal ends**

Approval: *J.D Aldana*  
 Date: August 24, 2015