

Part Number	CD60B-2EJ145174R-M1	Revision
Customer P/N	20400402 / 2151461	Revision
Capacitance	145 to 174	uF.
Voltage	250	VAC
Dielectric	Aluminum Electrolytic Motor Start	
Terminal Type	Dual .250" X .03" Quick Connect Terminals	
Operating Temperature	-25 to 65	°C.
Dissipation Factor	0.1	max. @ 60 Hz.

	Dimension	Tolerance
Diameter (D)	1.81	0.03
Terminal Spacing (C)	0.32	ref.
Height (L)	4.37	0.03
Quick-Connect Terminal	double	F


Dimensions in inches

Stamping	Motor Capacitors CD60B-2EJ145174R-M1 145-174 uF. 250 VAC Motor Starting Capacitor -25 ~ +65 C. RU (datecode) RoHS NOTE: 15K Ohm Discharge Resistor Attached
----------	---

Type 2- Standard Duty

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

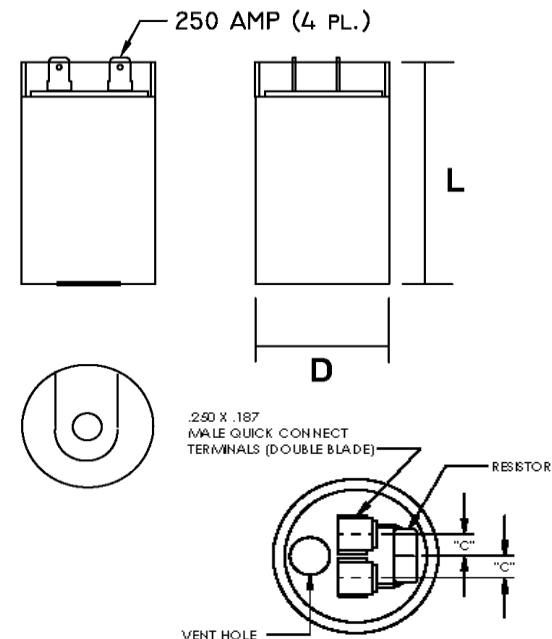

Approval: J.D. Aldana
Date: **December 12, 2001**