

Part Number	CD60B-3CJ2732	Revision	A
Customer P/N	K04206-0015 / K04327-0015	Revision	A
Capacitance	27 to 32	uF.	
Voltage	330	VAC	
Dielectric	Aluminum Electrolytic Motor Start		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25 to 65	°C.	
Dissipation Factor	0.1	max. @ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.81	0.03
Height (L)	3.38	0.06
Quick-Connect Terminal	double	F
<i>Dimensions in inches</i>		

Stamping	Motor Capacitors CD60B-3CJ2732 27-32 uF. 330 VAC K04206-0015 / K04327-0015 -25 ~ +65 C. RU (datecode) RoHS	
----------	---	---

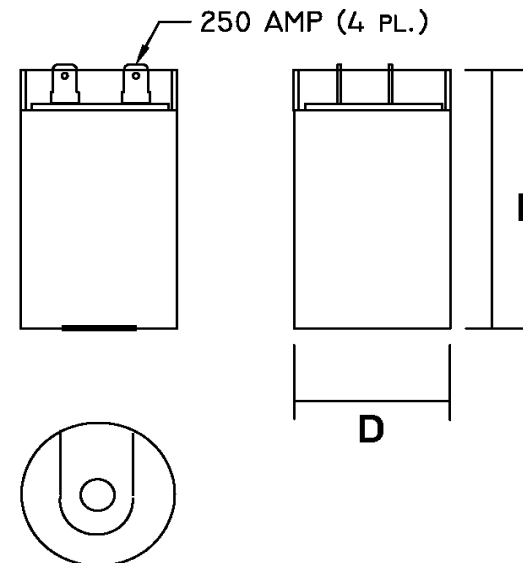

Dual AMP.250 Quick-Connects

Approval: J.D. Aldana
Date: October 21, 2003