

Part Number	CD60B-3CJ4352R		Revision
Customer P/N	22509970		Revision
Capacitance	43	to	52 uF.
Voltage	330		VAC
Dielectric	Aluminum Electrolytic Motor Start		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	65 °C.
Dissipation Factor	0.1		max. @ 60 Hz.

	Dimension	Tolerance
Diameter (D)	1.81	0.03
Terminal Spacing (C)	0.32	ref.
Height (L)	3.38	0.06
Quick-Connect Terminal	double	F

Dimensions in inches


Stamping

Motor Capacitors
CD60B-3CJ4352R
43-52 uF. 330 VAC 50/60 Hz.
Motor Starting Capacitor
-25 ~ +65 C.
RU (datecode) RoHS 
NOTE: 15K Ohm Discharge Resistor Attached

Dual AMP.250 Quick-Connects
Type 2 - Standard Duty

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

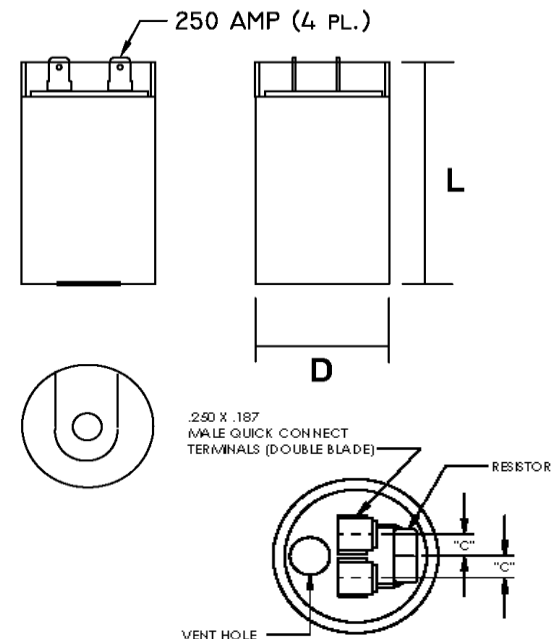

Approval: J.D. Aldana
Date: April 10, 2003