
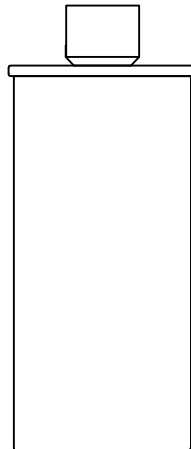
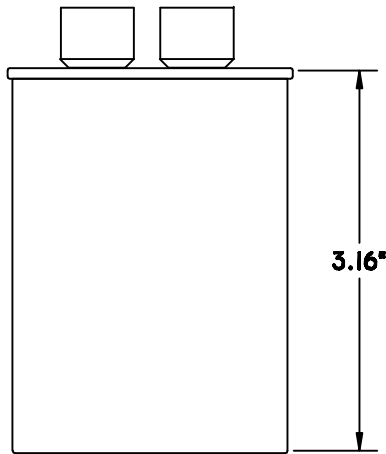


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

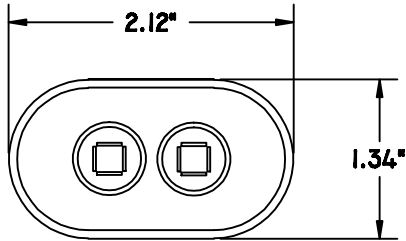

SPECIFICATION

CAPACITANCE: 1.0 UF +/-3%
RATED VOLTAGE: 2,100 VAC @ 50/60 HZ
OPERATING TEMPERATURE: -25°C ~ +70°C
CASE: STEEL
TERMINALS: FOUR-BLADE AMP .250 QUICK-CONNECT
DIELECTRIC: COMPOSITE
DISSIPATION FACTOR: <0.35%, 50 HZ.)
DIELECTRIC STRENGTH: 4.3 X RATED VOLTAGE FOR 10 SEC.

STAMPING

MOTOR-CAP
CH85-2100-105
1.0 UF. 3%
2,100 VAC 50/60 HZ.

DIMENSIONS IN INCHES +/- 0.04"



Motor Capacitors, Inc Division of Capacitor Industries 335 Beinoris Drive Wood Dale, IL 60191		<small>HCI PART NUMBER</small> CH85-2100-105		
		<small>CUSTOMER PART NUMBER</small> -----		
<small>DRAWING BY:</small> JDGA	<small>DATE DWG</small> 08/06/15	<small>DWG NO.</small>	<small>REV</small>	
<small>APPROVED BY:</small> LD	<small>SCALE</small>	<small>SHEET</small>		