
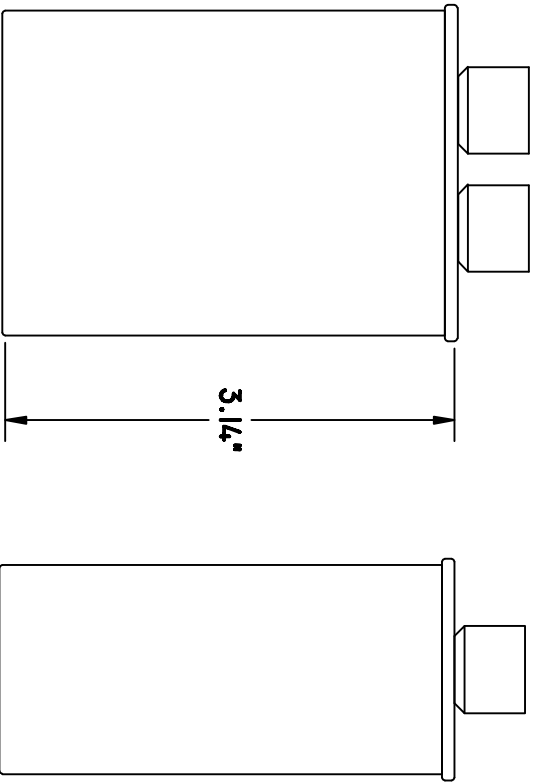


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

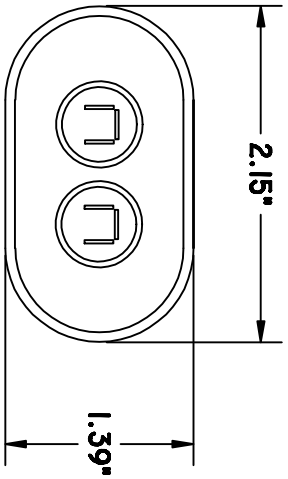

SPECIFICATION

CAPACITANCE: 0.74 UF +/-3%
 RATED VOLTAGE: 2,100 VAC
 OPERATING TEMPERATURE: -10°C ~ +85°C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: < 0.35%, 50 HZ
 BLEEDER RESISTOR: 10 M OHMS

STAMPING

MANUFACTURER / PART NUMBER
 CAPACITANCE / TOLERANCE / VOLTAGE
 TEMP. RATING / NO PCB'S

Motor Capacitors, Inc
 Division of Capacitor Industries
 335 Belmonts Drive
 Wood Dale, IL 60191

HC1 Part Number: **CH85-2100-744**
 CUSTOMER PART NUMBER: -----

DRAWN BY: **JDGA** DATE DWG: **02/22/18** DWG NO.:
 APPROVED BY: **LD** SCALE: SHEET: REV:

MOTOR
 Capacitors, Inc.