


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATION

CAPACITANCE: 0.95 UF +/-3%
 RATED VOLTAGE: 2,100 VAC @ 50/60 HZ
 OPERATING TEMPERATURE: -10 °C ~ +85 °C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: 0.35% MAX, 50 HZ.

STAMPING

MOTOR-CAP
 CH85-2100-954
 0.95 UF. 3%
 2,100 VAC
 50/60 HZ.

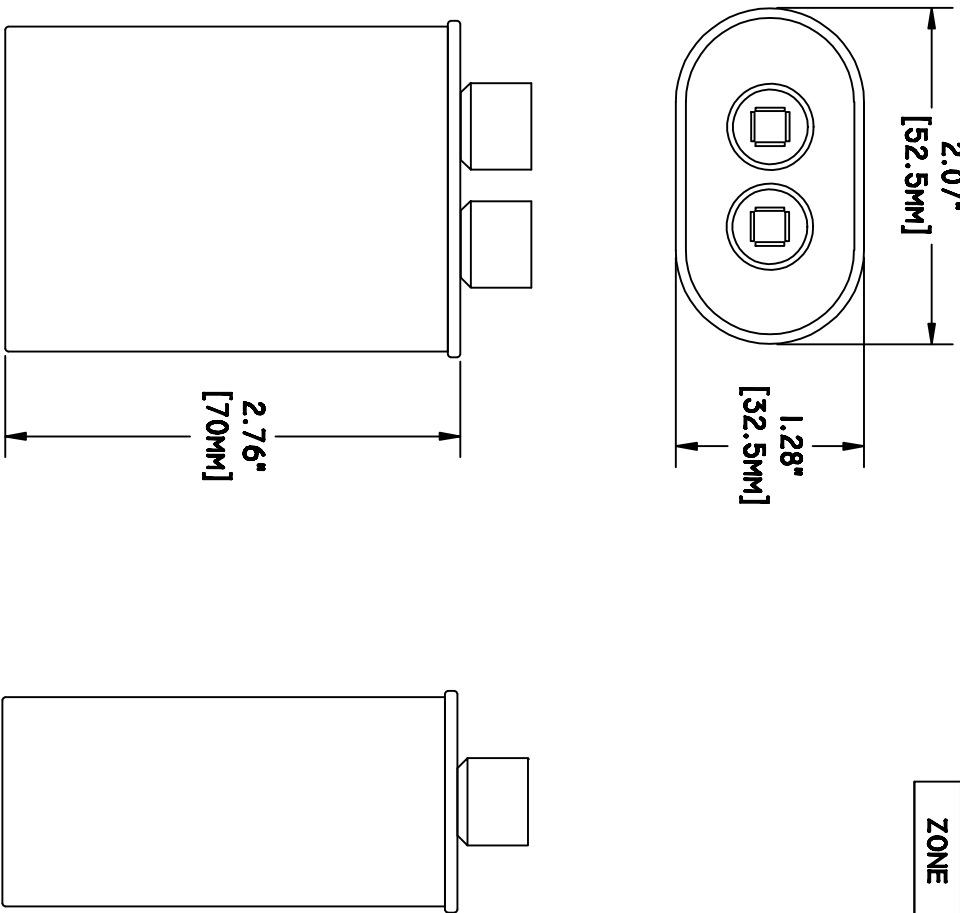

MOTOR
 Capacitors, Inc.

Motor Capacitors, Inc Division of Capacitor Industries 335 Belmonts Drive Wood Dale, IL 60191		HCL Part Number CH85-2100-954	
DRAWING BY: JDGA	DATE DWG: 07/31/17	CUSTOMER PART NUMBER -----	DWG NO. -----
APPROVED BY: LD	SCALE	SHEET	REV D