
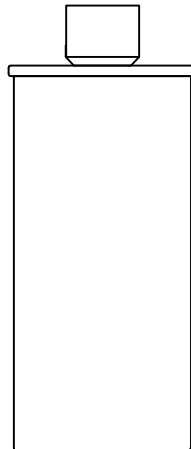
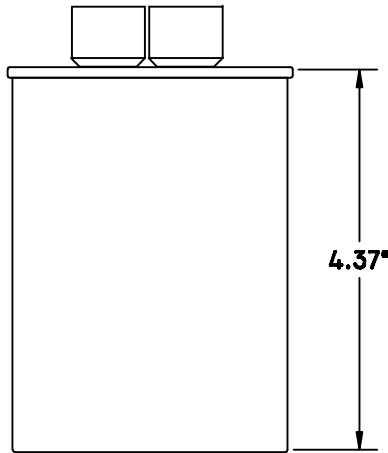


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

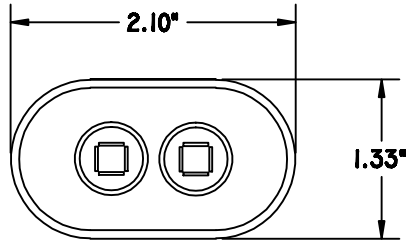

SPECIFICATION

CAPACITANCE: 1.03 UF +/-3%
RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
OPERATING TEMPERATURE: -25°C ~ +85°C
CASE: ALUMINUM
TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
DIELECTRIC: COMPOSITE
DISSIPATION FACTOR: <0.30%, 50 HZ.)
BLEEDER RESISTOR: 10 M OHMS

STAMPING

MANUFACTURER / PART NUMBER
CAPACITANCE / TOLERANCE / VOLTAGE
TEMP. RATING / NO PCB'S



| | | | | |
|---|--|---|--------------------|--|
| Motor Capacitors, Inc Division of Capacitor Industries 335 Beinoris Drive Wood Dale, IL 60191 | | <small>HCI PART NUMBER</small> CH85-2500-1034 | | |
| | | <small>CUSTOMER PART NUMBER</small> ----- | | |
| <small>DRAWING BY:</small> JDGA | <small>DATE DWG</small> 08/07/15 | <small>DWG NO.</small> | <small>REV</small> | |
| <small>APPROVED BY:</small> LD | <small>SCALE</small> | <small>SHEET</small> | | |