




REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS:

CAPACITANCE: 1.00 μ F
 RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
 OPERATING TEMPERATURE: -25°C ~ +70°C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: < 0.35% (50 HZ.)
 INTERNAL BLEED RESISTOR

STAMPING:

MANUFACTURER
 PART NUMBER
 CAPACITANCE & TOLERANCE
 RATED VOLTAGE
 FREQUENCY

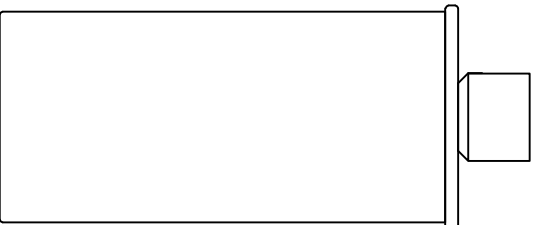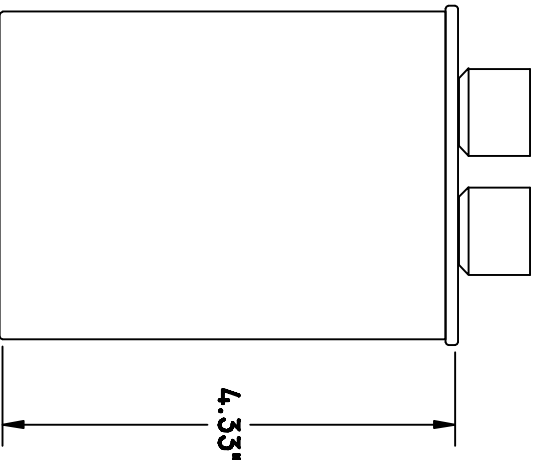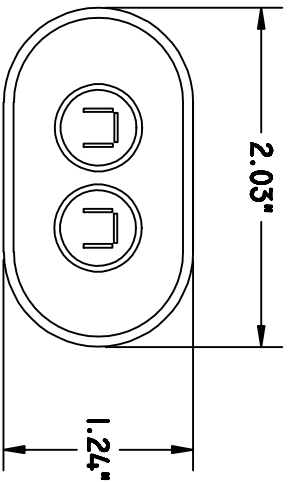

MOTOR
 Capacitors, Inc.

Motor Capacitors, Inc Division of Capacitor Industries 335 Belmont Drive Wood Dale, IL 60191		HCL Part Number CH85-2500-105	
DRAWING BY: JDGA	DATE DWG: 10/31/16	DWG NO. -----	CUSTOMER PART NUMBER -----
APPROVED BY: LD	SCALE	SHEET	REV A