
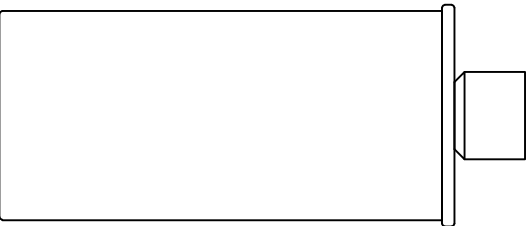
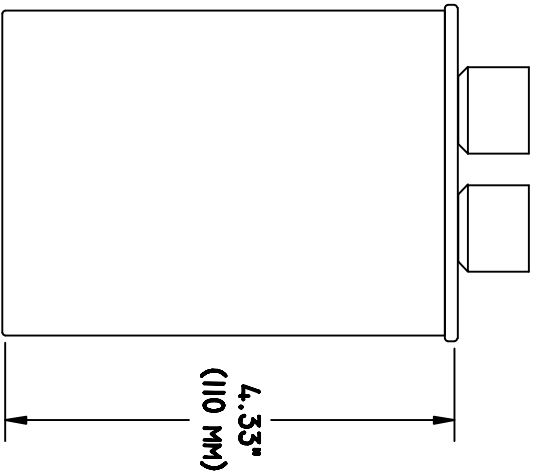


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

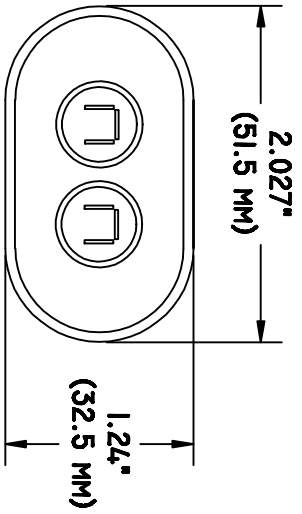

SPECIFICATION

CAPACITANCE: 1.10 UF ± 3%
 RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
 OPERATING TEMPERATURE: -10 °C ~ +85 °C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: < 0.35%, 50 HZ
 BLEEDER RESISTOR: 10 M OHMS
 ROHS COMPLIANT

STAMPING

MANUFACTURER
 PART NUMBER
 CAPACITANCE & TOLERANCE
 VOLTAGE
 TEMP. RATING
 NO PCB'S
 ROHS

MOTOR
 Capacitors, Inc.

Motor Capacitors, Inc		HC1 Part Number		CH85-2500-115	
Division of Capacitor Industries 335 Belnois Drive Wood Dale, IL 60191		Customer Part Number		-----	
DRAWN BY:	JDGA	DATE DWG	08/09/18	DWG NO.	
APPROVED BY:	LD	SCALE		SHEET	
					REV
					A