
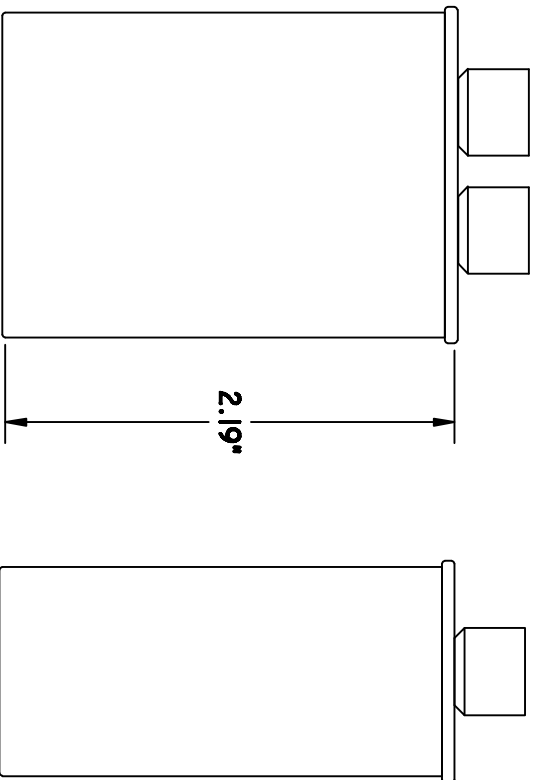


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

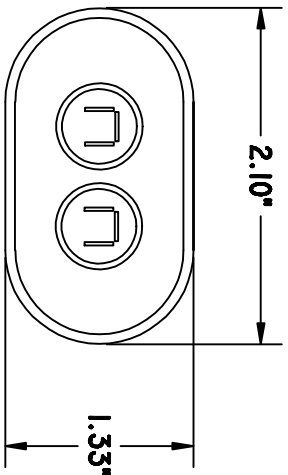

**SPECIFICATION**

CAPACITANCE: 0.22 UF +/-3%  
 RATED VOLTAGE: 2,500 VAC  
 OPERATING TEMPERATURE: -10°C ~ +85°C  
 CASE: ALUMINUM  
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT  
 DIELECTRIC: COMPOSITE  
 DISSIPATION FACTOR: < 0.35%, 50 HZ  
 BLEEDER RESISTOR: 10 M OHMS

**STAMPING**

MANUFACTURER / PART NUMBER  
 CAPACITANCE / TOLERANCE / VOLTAGE  
 TEMP. RATING / NO PCB'S

<b>Motor Capacitors, Inc</b> Division of Capacitor Industries 335 Belmonts Drive Wood Dale, IL 60191		HCL Part Number <b>CH85-2500-224</b>	
DRAWING BY: <b>JDGA</b>	DATE DWG <b>02/22/18</b>	DWG NO. -----	REV -----
APPROVED BY: <b>LD</b>	SCALE	SHEET	REV

**MOTOR**  
 Capacitors, Inc.