
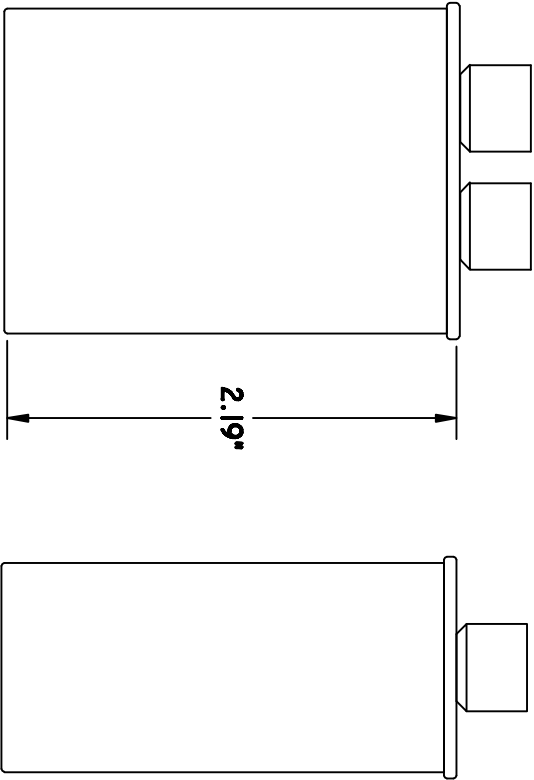


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

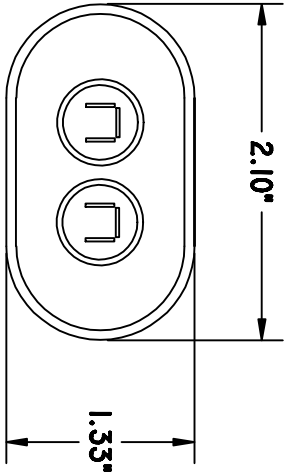

SPECIFICATION

CAPACITANCE: 0.25 UF +/-3%
 RATED VOLTAGE: 2,500 VAC
 OPERATING TEMPERATURE: -10°C ~ +85°C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: < 0.35%, 50 HZ
 BLEEDER RESISTOR: 10 M OHMS

STAMPING

MANUFACTURER / PART NUMBER
 CAPACITANCE / TOLERANCE / VOLTAGE
 TEMP. RATING / NO PCB'S

Motor Capacitors, Inc

Division of Capacitor Industries
 335 Belmonts Drive
 Wood Dale, IL 60191

MCI PART NUMBER
 CH85-2500-254

CUSTOMER PART NUMBER

DRAWN BY:

JDGA

DATE DWG

02/22/18

DWG NO.

APPROVED BY:

LD

SCALE

SHEET

REV

MOTOR
Capacitors, Inc.