
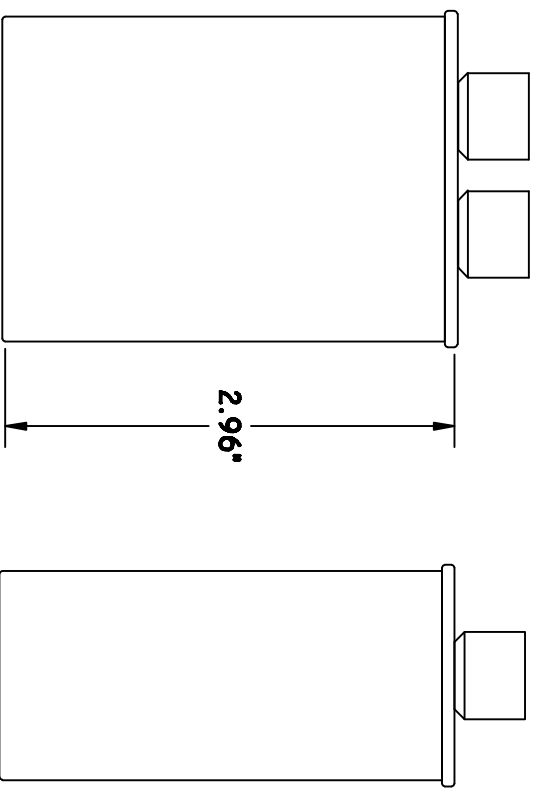


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

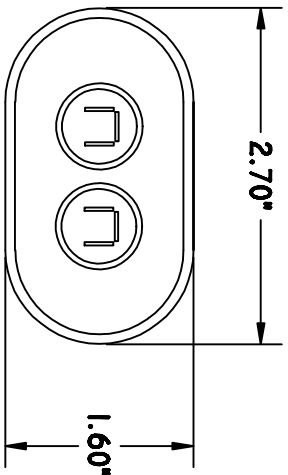

SPECIFICATION

CAPACITANCE: 0.74 UF +/-3%
 RATED VOLTAGE: 2,500 VAC
 OPERATING TEMPERATURE: -10°C ~ +85°C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: < 0.35%, 50 HZ
 BLEEDER RESISTOR: 10 M OHMS

STAMPING

MANUFACTURER / PART NUMBER
 CAPACITANCE / TOLERANCE / VOLTAGE
 TEMP. RATING / NO PCB'S

Motor Capacitors, Inc	HC1 Part Number	CH85-2500-744
Division of Capacitor Industries 335 Belmont Drive Wood Dale, IL 60191	Customer Part Number	-----

Motor Capacitors, Inc	DATE DWG	DWG NO.	REV
Division of Capacitor Industries 335 Belmont Drive Wood Dale, IL 60191	02/22/18		
DRAWN BY:	SCALE	SHEET	
JDGA			
APPROVED BY:			
LD			

MOTOR
 Capacitors, Inc.