

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED


SPECIFICATION

CAPACITANCE: 0.90 UF +/-3%
 RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
 OPERATING TEMPERATURE: -10°C ~ +85°C
 CASE: ALUMINUM
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
 DIELECTRIC: COMPOSITE
 DISSIPATION FACTOR: <0.35%, 50 HZ.)
 BLEEDER RESISTOR: 10 M OHMS

ALL DIMENSIONS: +/- 0.03"

STAMPING

MANUFACTURER / PART NUMBER
 CAPACITANCE / TOLERANCE / VOLTAGE
 TEMP. RATING / NO PCB'S

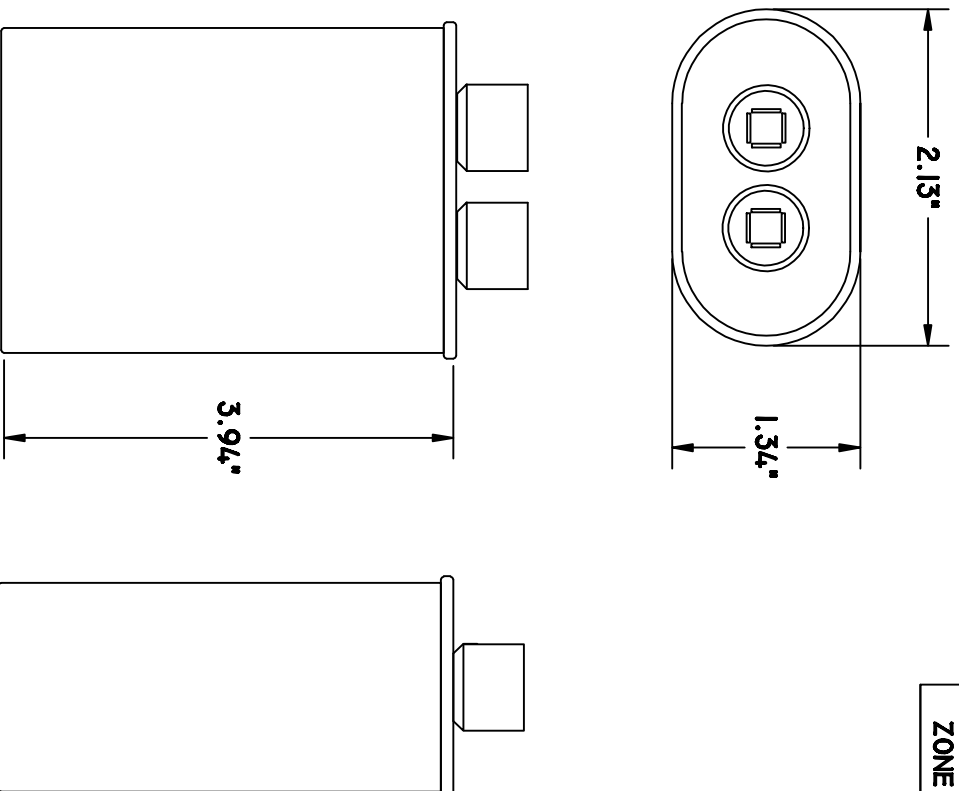

MOTOR
 Capacitors, Inc.

Motor Capacitors, Inc Division of Capacitor Industries 335 Belmont Drive Wood Dale, IL 60191		HCL Part Number CH85-2500-904	
DRAWING BY: JDGA	DATE DWG 02/22/18	DWG NO. -----	CUSTOMER PART NUMBER -----
APPROVED BY: LD	SCALE 		SHEET
			REV D