



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATION

CAPACITANCE: 0.91 UF +/-4%
RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
OPERATING TEMPERATURE: -10°C ~ +85°C
CASE: ALUMINUM
TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
DIELECTRIC: COMPOSITE
DISSIPATION FACTOR: <0.30%, 50 HZ.)
BLEEDER RESISTOR: 10 M OHMS

STAMPING

MANUFACTURER / PART NUMBER
CAPACITANCE / TOLERANCE / VOLTAGE
TEMP. RATING / NO PCB'S

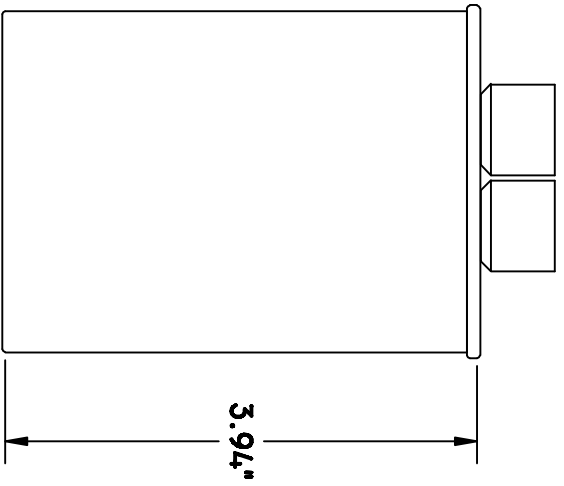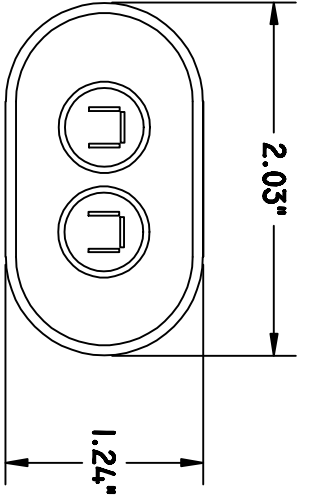

NCI PART NUMBER
CH85-2500-914

Motor Capacitors, Inc
 Division of Capacitor Industries
 335 Belmorts Drive
 Wood Dale, IL 60191

CUSTOMER PART NUMBER

DRAWING BY: JDGA	DATE DWG: 11/24/14	DWG NO.	REV
APPROVED BY: LD	SCALE		SHEET

