
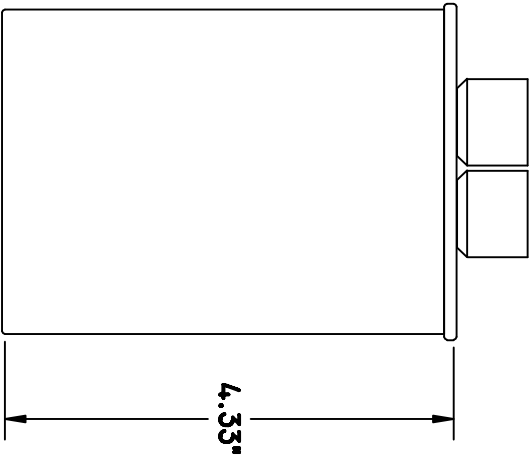


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

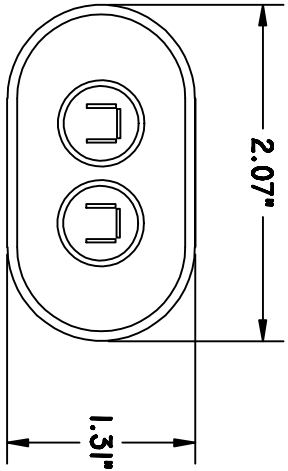

SPECIFICATION:

CAPACITANCE: 0.95 UF +/-3%
RATED VOLTAGE: 2,500 VAC @ 50/60 HZ
OPERATING TEMPERATURE: -25°C ~ +85°C
CASE: ALUMINUM
TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT
DIELECTRIC: COMPOSITE
DISSIPATION FACTOR: < 0.30%, 50 HZ
BLEEDER RESISTOR: 10 M OHMS

STAMPING:

MANUFACTURER / PART NUMBER
CAPACITANCE / TOLERANCE / VOLTAGE
TEMP. RATING / NO PCB'S / ROHS

Motor Capacitors, Inc

Division of Capacitor Industries
 335 Belmoris Drive
 Wood Dale, IL 60191

CH85-2500-954

MCI PART NUMBER
 CUSTOMER PART NUMBER

DRAWING BY: JDGA
 APPROVED BY: LD

DATE DWG: 05/24/17
 SCALE:

DWG NO.

SHEET

REV

MOTOR
Capacitors, Inc.