
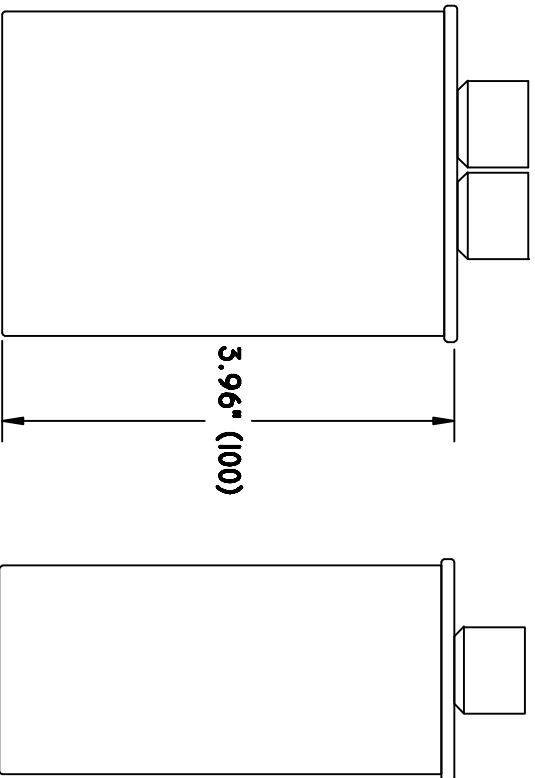


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

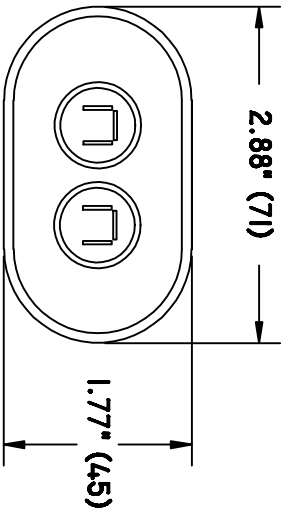

**SPECIFICATION**

CAPACITANCE: 1.30 UF +/-5%  
 RATED VOLTAGE: 3,000 VAC @ 50/60 HZ  
 OPERATING TEMPERATURE: -10°C ~ +70°C  
 CASE: ALUMINUM  
 TERMINALS: THREE-BLADE AMP .250 QUICK-CONNECT  
 DIELECTRIC: COMPOSITE  
 DISSIPATION FACTOR: <0.30%, 50 HZ.)  
 BLEEDER RESISTOR: 10 M OHMS

**STAMPING**

MOTOR-CAP  
 CH85-3000-135  
 1.30UF (+/-3%)  
 3000 VAC 50/60HZ.  
 -10° +70°C  
 NON-PCB OIL

**MOTOR**  
 Capacitors, Inc.

<b>Motor Capacitors, Inc</b> Division of Capacitor Industries 335 Belmoris Drive Wood Dale, IL 60191		HCL PART NUMBER <b>CH85-3000-135</b>	
DRAWING BY: <b>JDGA</b>	DATE DWG: <b>02/28/17</b>	DWG NO.: -----	REV: <b>A</b>
APPROVED BY: <b>LD</b>	SCALE:	SHEET:	