

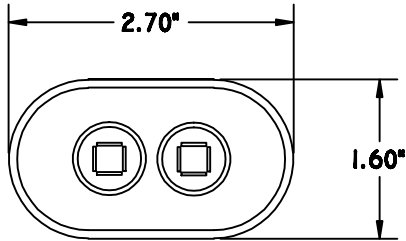


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

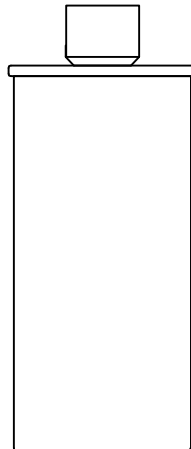

SPECIFICATION

CAPACITANCE: 0.74 UF +/-3%
RATED VOLTAGE: 3,000 VAC @ 50/60 HZ
OPERATING TEMPERATURE: -25°C ~ +85°C
CASE: ALUMINUM
TERMINALS: TWO-BLADE AMP .250 QUICK-CONNECT
DIELECTRIC: COMPOSITE
DISSIPATION FACTOR: <0.30%, 50 HZ.)
BLEEDER RESISTOR: 10 M OHMS

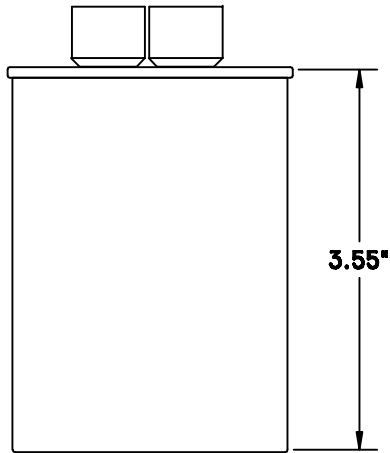

STAMPING

MANUFACTURER / PART NUMBER
CAPACITANCE / TOLERANCE / VOLTAGE
TEMP. RATING / NO PCB'S



Motor Capacitors, Inc Division of Capacitor Industries 335 Beinoris Drive Wood Dale, IL 60191	<small>HCI PART NUMBER</small> CH85-3000-744		
	<small>CUSTOMER PART NUMBER</small> -----		
<small>DRAWING BY:</small> JDGA	<small>DATE DWG</small> 08/07/15	<small>DWG NO.</small>	<small>REV</small>
<small>APPROVED BY:</small> LD	<small>SCALE</small>	<small>SHEET</small>	