


Part Number	DAL-6FJ003		Revision	
Customer P/N			Revision	
Capacitance	3	μ F.	Tolerance	5.0%
Voltage	660	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-25 °C.-		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.57/1.68	0.06
Case Height (H)	2.16	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.

Dimensions in inches

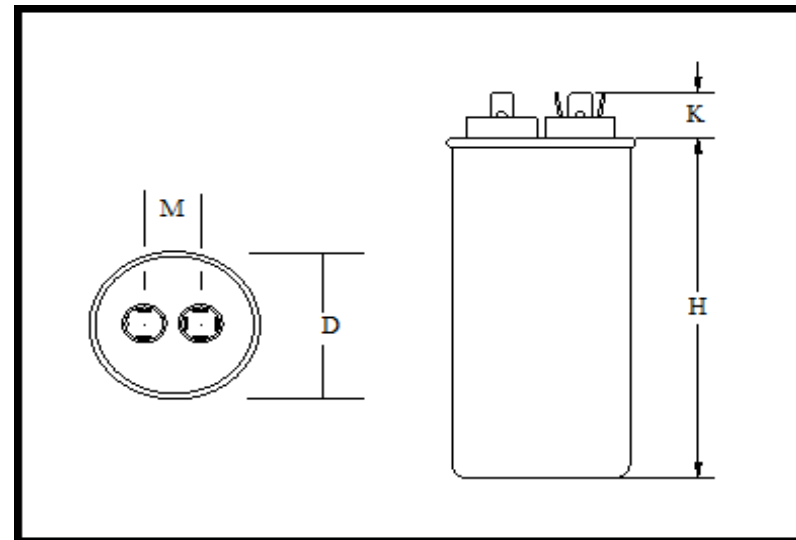

Stamping

**3 μ F. 5% 660V 50/60 Hz. SH Capacitor
 Motor Capacitors**

**Non PCB Protected 10,000 AFC
 DAL-6FJ003**

Approval : *J. D. Aldana*
 Date : January 31, 2000