

Part Number	DMB370G106J		Revision
Customer P/N			Revision
Capacitance	10	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.28	0.06
Thickness (T)	0.98	0.06
Height (H)	1.57	0.06
Total Thickness (Tt)	1.49	0.06
Wire Length (G)	3.50	0.50
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Red	
Mountng Tab Thickness (Mt)	0.20	0.02


Dimensions in inches

Stamping

**MOTOR-CAP
DMB-TYPE
10 uF 5%
370 VAC
50/60 Hz -25 - +85 C**



RU

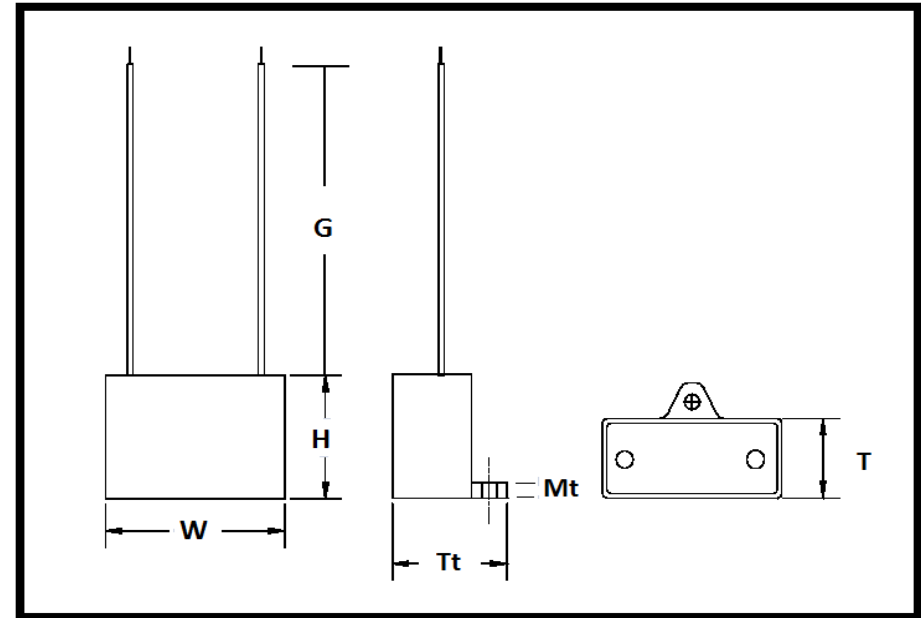

UL Recognized Component

Approval: J.D. Aldana
 Date: March 14, 2000

