


Part Number	MEX250S334K	Revision	
Customer P/N		Revision	
Capacitance	0.330	uF.	Tolerance 10%
Voltage	250	VAC	
Dielectric		Metallized Polyester	
Terminal Type		PCB-Mount Pins	
Operating Temperature		-40 85	°C.
Dissipation Factor	1.00%	maximum @ 25 °C, 1 KHz	

MOTOR Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	1.04	0.04
Thickness (T)	0.33	0.04
Height (H)	0.64	0.04
Lead Spacing (S)	0.89	ref.
Wire Length (G)	1.00	ref.
Wire Gauge (Gw)	20	AWG

Dimensions in inches

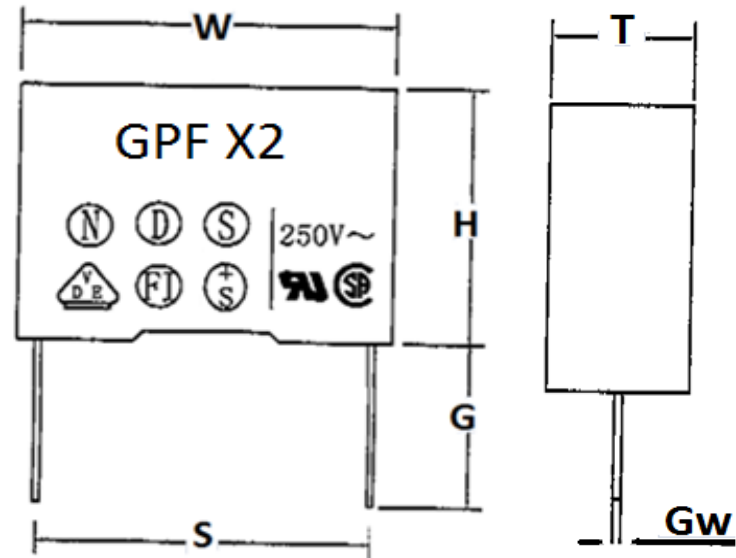

Stamping	Logo
	0.33 uF K X2
	250/275 VAC
	MEX GPF
	40/85/21
	N D FI S S+
	RU, cRU, VDE



Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana
 Date May 24, 2016