


Part Number	MEX250S474J		Revision	
Customer P/N			Revision	
Capacitance	0.470	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polyester			
Terminal Type	PCB-Mount Pins			
Operating Temperature	-40 85 °C.			
Dissipation Factor	1.00%	maximum @ 25 °C, 1 KHz		

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.04	0.04
Thickness (T)	0.39	0.04
Height (H)	0.72	0.04
Lead Spacing (S)	0.92	ref.
Wire Length (G)	1.00	ref.
Wire Gauge (Gw)	20	AWG

*Dimensions in inches*

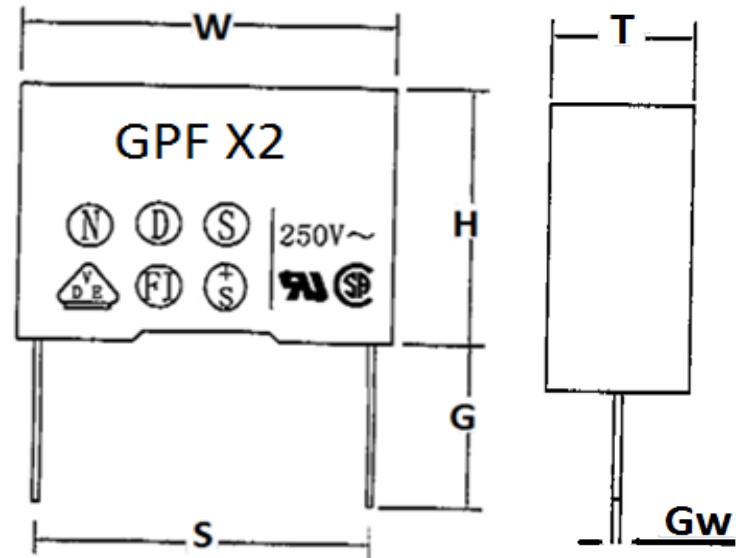

Stamping	Logo
	0.47 uF J X2 250/275 VAC MEX GPF D FI S+ S N RU, cRU, VDE



Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana  
 Date May 24, 2016