

Part Number	MFA54850	Revision	
Customer P/N		Revision	
Capacitance	54.8	uF.	Tolerance -5%/10%
Voltage	500	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	55	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	2.36	0.02
Height (H)	5.43	0.04
Stud (M)	M12	

Dimensions in inches

Stamping	Italfarad
	MFA
	54.8 uF -5%/+10% 500 VAC
	4.3 KVAR
	-25/D
	EN 60831-1/2, IEC 831-1/2
	CE Datecode

Etched Stamping

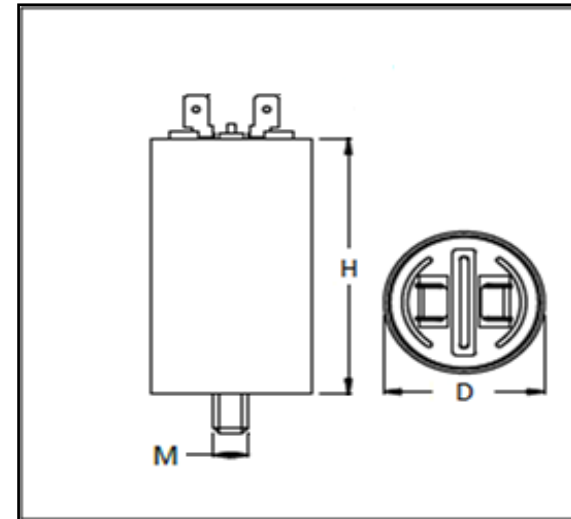

Engineer J.D. Aldana
Date October 13, 2016