

Part Number	MFA66644	Revision	
Customer P/N		Revision	
Capacitance	66.6	uF.	Tolerance -5%/10%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	55	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	2.36	0.02
Height (H)	5.46	0.04
Stud (M)	M12	

Dimensions in inches

Stamping
Italfarad
MFA
66.6 uF -5%/+10% 440 VAC
4 KVAR
-25/D
EN 60831-1/2, IEC 831-1/2
CE Datecode

Etched Stamping

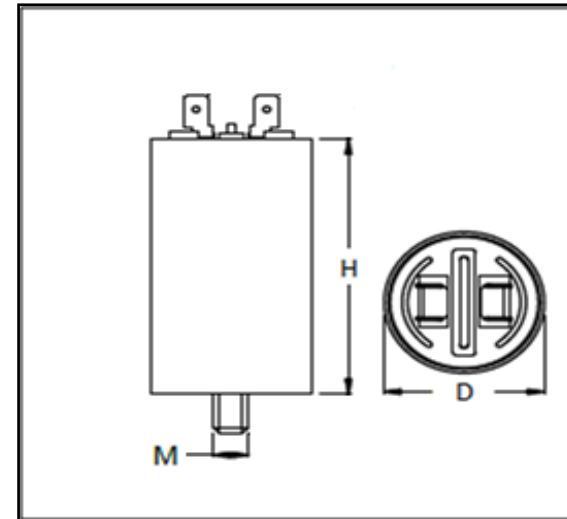

Engineer J.D Aldana  
Date June 11, 2015