

Part Number	MFR-4-405-M8	Revision	A
Customer P/N		Revision	A
Capacitance	4	uF.	Tolerance 5%
Voltage	500	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-40	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.18	0.02
Height (H)	2.48	0.04
Stud (M)	M8 Stud	

Dimensions in inches

Stamping
Logo / Italfarad
MFR-4
4 uF ±5% 500 VAC
40/085/21 50/60 Hz
S2 Protected 10,000 AFC
RU, VDE, CE
Datecode

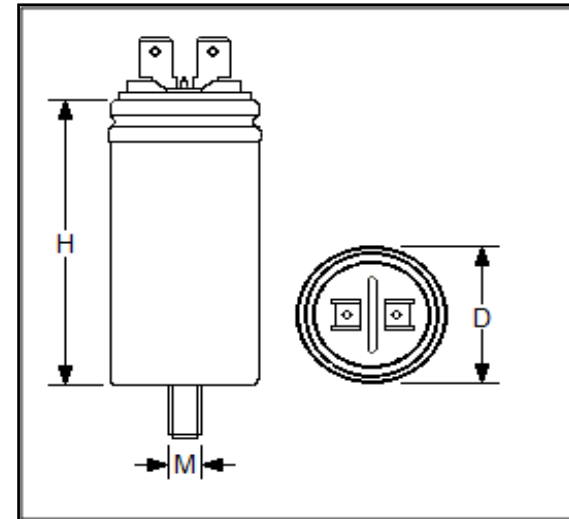

Engineer J.D. Aldana  
Date March 17, 2016