


Part Number	MPX250S225J		Revision	
Customer P/N			Revision	
Capacitance	2.20	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	PCB-Mount Pins			
Operating Temperature	-40	85	°C.	
Dissipation Factor	0.03%	maximum	45454.545	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	inches	mm.
Width (W)	1.57	39
Thickness (T)	0.71	18
Height (H)	1.15	29
Lead Spacing (S)	0.59	15
Wire Length (G)	1.00	25
Wire Gauge (Gw)	20	AWG

Dimensions in inches

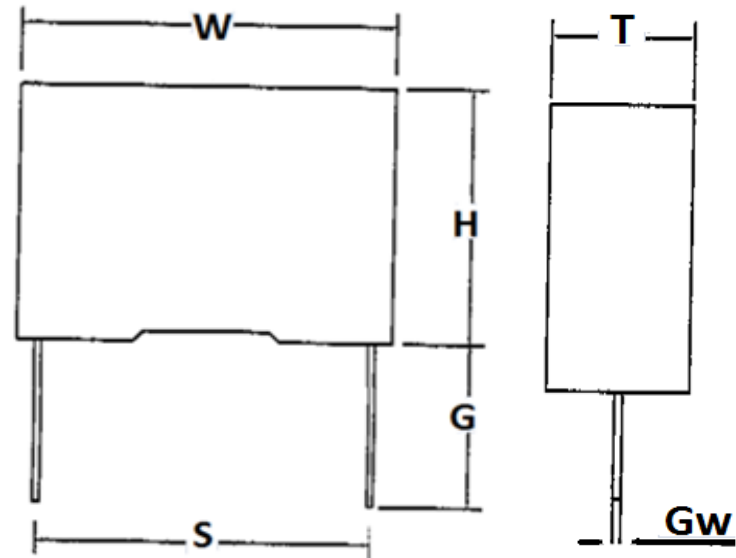

Stamping	MPX GPF/C
	2.2 uF , 5%, SH
	250/275 VAC
	ЯU, сЯU, VDE

Capacitor housed in a Black Plastic Box.

Engineer J.D Aldana
 Date June 1, 2004