


Part Number	MPX250S333J	Revision	
Customer P/N		Revision	
Capacitance	0.03	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	PCB-Mount Pins		
Operating Temperature		-40 85 °C.	
Dissipation Factor	0.030%	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	inches	mm.
Width (W)	0.51	13.0
Thickness (T)	0.20	5.0
Height (H)	0.43	11.0
Lead Spacing (S)	0.59	15.0
Wire Length (G)	1.00	25.4
Wire Gauge (Gw)	20	AWG

*Dimensions in inches*

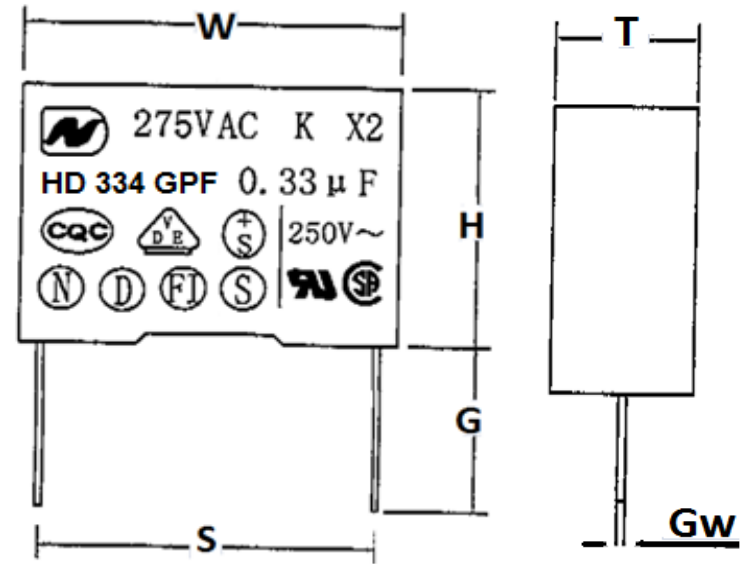

Stamping

MPX GPF/C  
 0.033 uF , 5%, SH  
 250/275 VAC

**RU** US

ЯU, сЯU, VDE

Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana  
 Date February 12, 2001