


Part Number	MPX275S334J		Revision	
Customer P/N			Revision	
Capacitance	0.33	uF.	Tolerance	5%
Voltage	275	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	PCB-Mount Pins			
Operating Temperature	-40	85	°C.	
Dissipation Factor	0.03%	maximum	45454.545	

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	inches	mm.
Width (W)	0.71	18
Thickness (T)	0.33	9
Height (H)	0.57	15
Lead Spacing (S)	0.59	15
Wire Length (G)	0.59	15
Wire Gauge (Gw)	20	AWG

*Dimensions in inches*

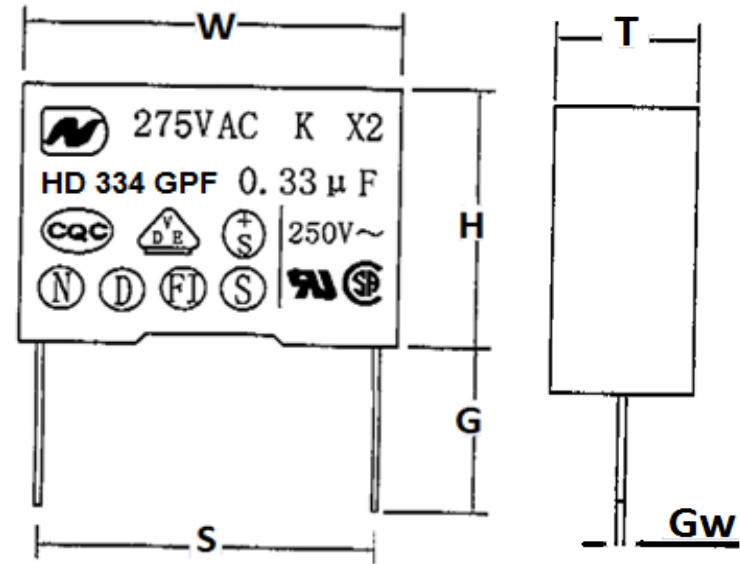

**Stamping**

Logo 275 VAC K X2  
 HD 334 GPF 0.33uF  
 CQC VDE S+  
 N D FI S  
  
 250V~ RU CSA

Capacitor housed in a Yellow, Plastic Box.

Engineer J.D Aldana  
 Date June 11, 2013