

Part Number	RPC0N205	Revision	A
Customer P/N		Revision	A
Capacitance	2	uF.	
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.10	0.03
Height (H)	2.20	0.03
Wire Length (G)	5.50	Min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping

Logo / Italfarad
RP-0 SH S0
2.0 uF. +/-5% 250 VAC
25/085/21 50/60 Hz
RU, cRU, VDE, CE
Datecode

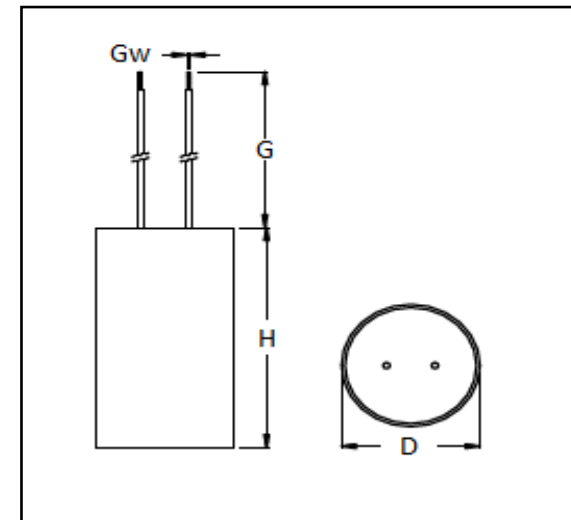

(NO Mounting Stud)

Engineer J.D. Aldana
Date March 17, 2016