

Part Number	RPC2N146M1	Revision	A
Customer P/N	1221301/4018173	Revision	A
Capacitance	14 uF.	Tolerance	5%
Voltage	450 VAC		
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.42	0.02
Height (H)	2.75	0.06
Wire Length (G)	6.00	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	14 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
Datecode	
Made in Romania	

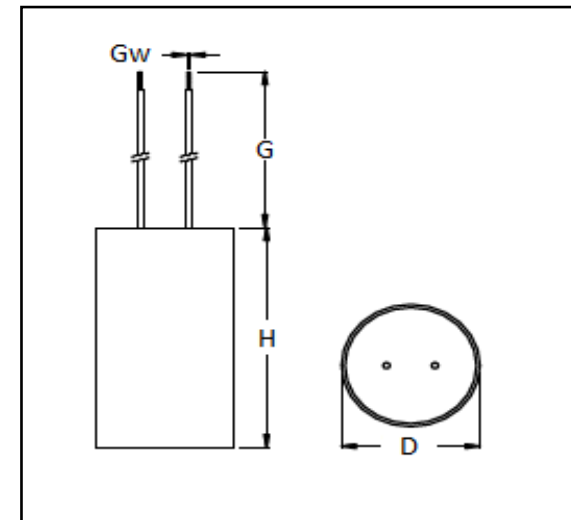

with eyelet #10 connector attached to end of both wires.

Engineer J.D. Aldana  
Date March 17, 2016