

Part Number	RPC2N146M8		Revision	
Customer P/N	416.10.21		Revision	
Capacitance	14	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	

MOTOR

Capacitors, Inc.


Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.42	0.02
Height (H)	2.75	0.06
M8 Stud	0.40	
Wire Length (G)	8.00	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping

Logo / Ducati
 RP-2 SH S0
 14 uF. +/-5% 425/475 VAC
 25/085/21 50/60 Hz
 VDE, CE
 Datecode

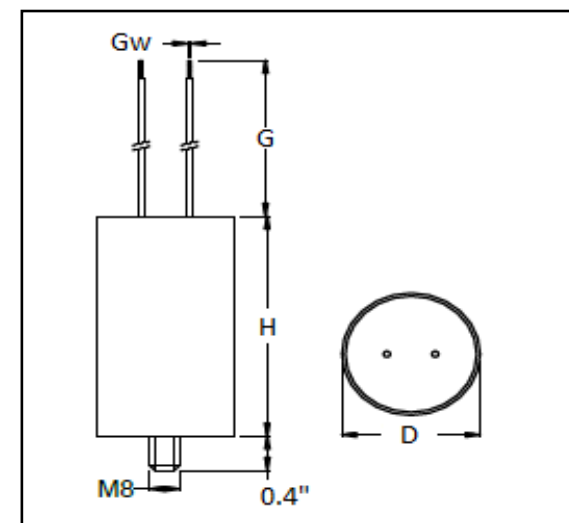

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D. Aldana
 Date July 10, 2024