

Part Number	RPC2N206	Revision	A
Customer P/N		Revision	A
Capacitance	20	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.


**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.57	0.02
Height (H)	2.69	0.06
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

<b>Stamping</b>	Logo / Italfarad
	RP-2 SH S0
	20 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
	

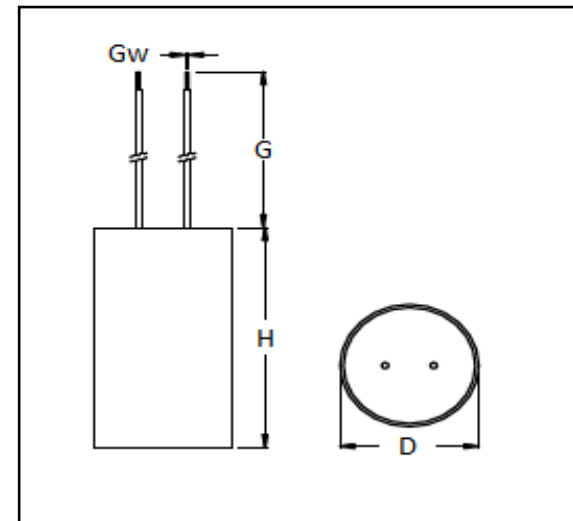

3M Capacitor: 78-8114-4918-6  
Plastic Case

Engineer J.D. Aldana  
Date March 17, 2016