

Part Number	RPC2N305M8	Revision	A
Customer P/N		Revision	A
Capacitance	3	uF.	
Voltage	450	VAC	Tolerance 5%
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR


Capacitors, Inc.




Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.10	0.02
Height (H)	2.19	0.06
M8 Stud	0.40	
Wire Length (G)	7.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	3 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
Made in Romania	

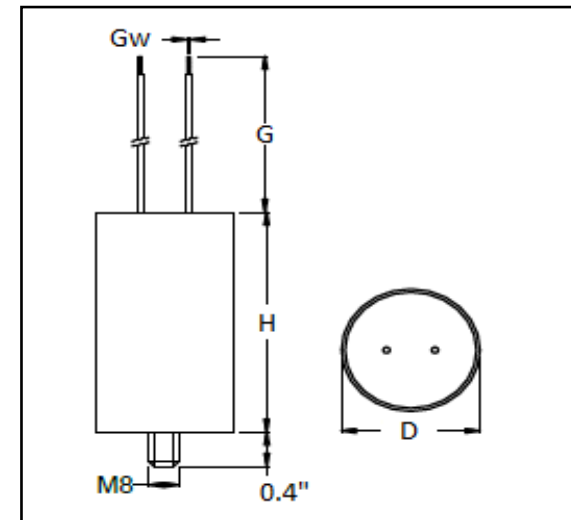

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D. Aldana
 Date March 17, 2016