

Part Number	RPC2N306M1		Revision	
Customer P/N			Revision	
Capacitance	30	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	


MOTOR


Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.77	0.02
Height (H)	3.55	0.06
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping 	Italfarad
	RP-2 SH S0
	30 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode

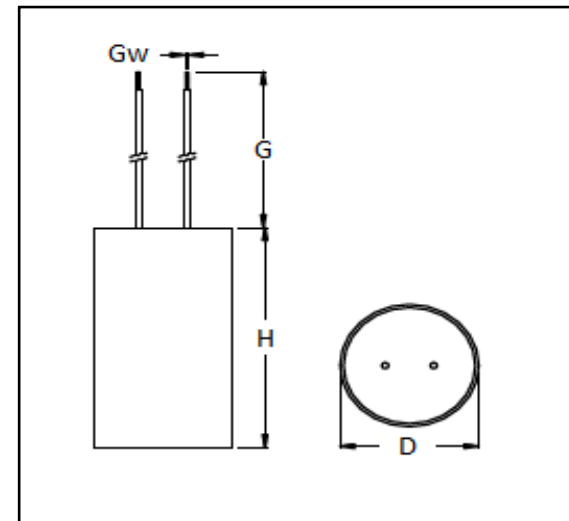

(NO Mounting Stud)
 Plastic Case

Engineer J.D. Aldana
 Date March 4, 2021