

Part Number	RPC2N306	Revision	A
Customer P/N	180210-172	Revision	A
Capacitance	30 uF.	Tolerance	5%
Voltage	450 VAC		
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

MOTOR

Capacitors, Inc.




Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.57	0.02
Height (H)	3.66	0.06
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	30 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
Datecode	
Made in Romania	

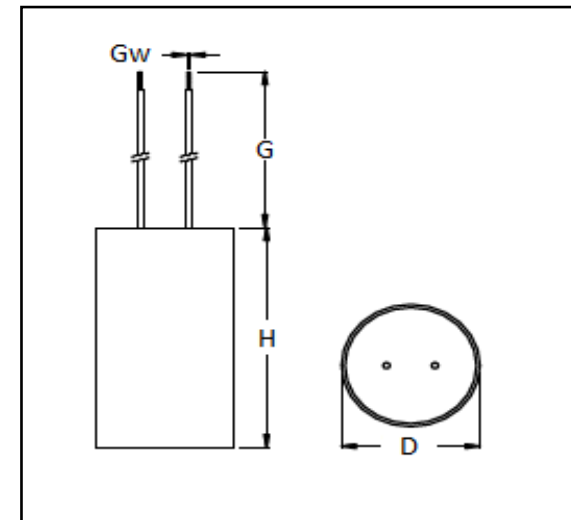

(NO Mounting Stud)
 (NO Mounting Stud)

Engineer J.D. Aldana
 Date March 17, 2016