

Part Number	RPC2N406M1	Revision	A
Customer P/N	1221701/4018180	Revision	A
Capacitance	40 uF.	Tolerance	5%
Voltage	450 VAC		
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	


MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.77	0.02
Height (H)	3.66	0.06
Wire Length (G)	6.00	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	40 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
Datecode	
Made in Romania	

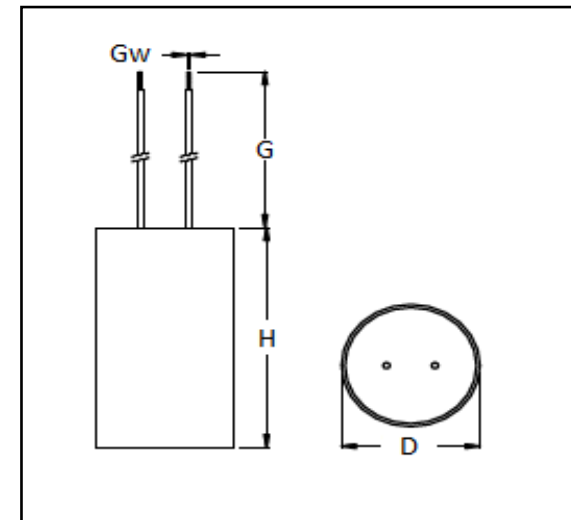

with eyelet #10 connector attached to end of both wires.
(NO Mounting Stud)

Engineer J.D. Aldana
Date March 17, 2016