

Part Number	RPC2Z805M8	Revision	B
Customer P/N		Revision	B
Capacitance	8	uF.	
Voltage	450	VAC	Tolerance 5%
Dielectric	Metallized Polypropylene		
Terminal Type	12 "Insulated Wire Leads		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.26	0.02
Height (H)	2.20	0.06
M8 Stud	0.40	
Wire Length (G)	12.00	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping 	Logo / Italfarad
	RP-2 SH S0
	8.0 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
	Made in Romania

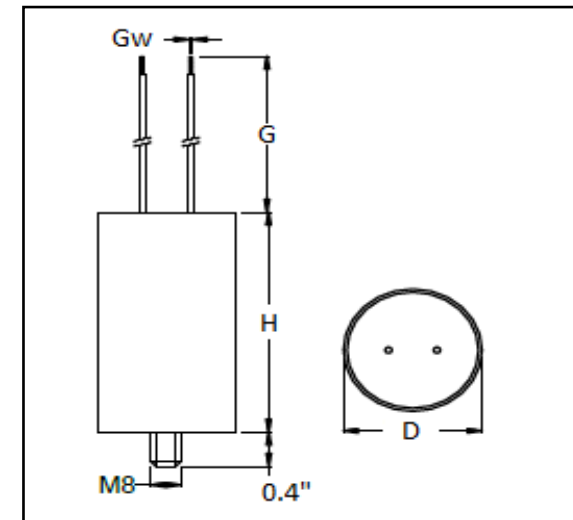

NOTE: MUST BE 12" Wire Leads

Engineer J.D. Aldana
Date March 17, 2016