

Part Number	RPC3N156		Revision	
Customer P/N			Revision	
Capacitance	15	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	


MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.57	0.06
Height (H)	2.84	0.06
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping 	Logo / Italfarad
	RP-3 SH S0
	15 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	ЯU, сЯU, VDE
	Datecode

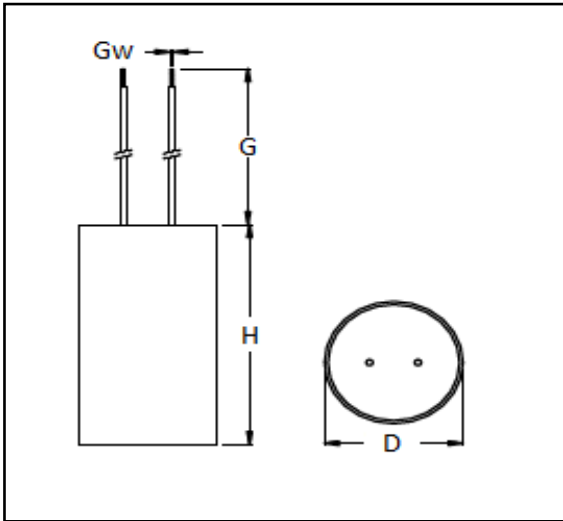

(NO Mounting Stud)

Engineer J.D. Aldana
Date August 8, 2017